



TELEVISION & RADIO AMPLIFIER

MODEL: AIDA118




Indoor Amplifier AIDA118 boosts Television and Radio DAB+ & FM signals by 18dB, VHF & UHF from a single input.



AIDA118 features flat frequency response, excellent filtering and is fully screened.

A blue LED power indicator shows when mains is connected.

The electronic power supply continually monitors and compensates automatically for mains power fluctuations.

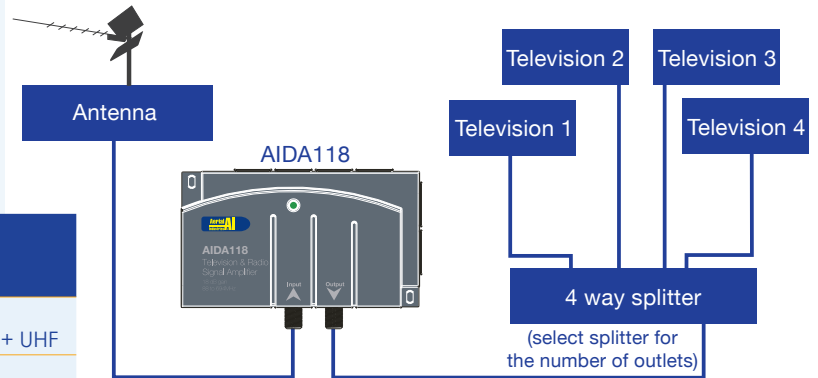

AIDA118	
Frequency Range	88 to 694MHz Passes Television DAB+ FM, Bands II + III + UHF
Gain	18dB
Flatness	±2.0dB
Return Loss	10dB typical
Lte 4G & Communications Rejection	>40dB
Noise Figure	<3.5dB
Impedance	75 Ohms
Max Output Level	103dBµv (IMA3-60dB, EN50083-5)
Power	85-265V @ 50Hz, <15mA
Connectors	F Type

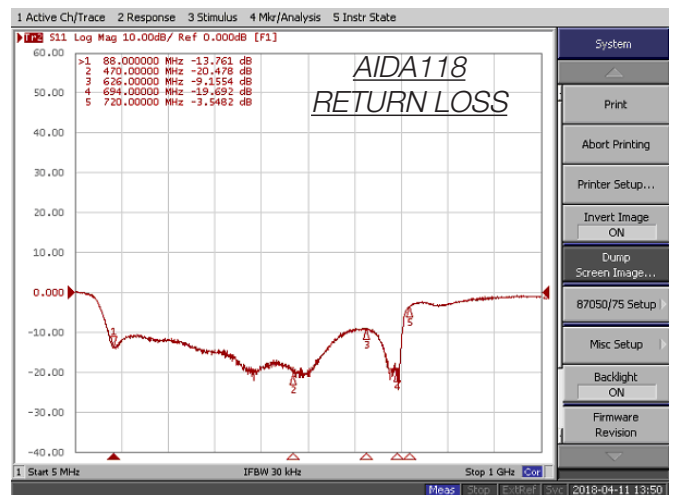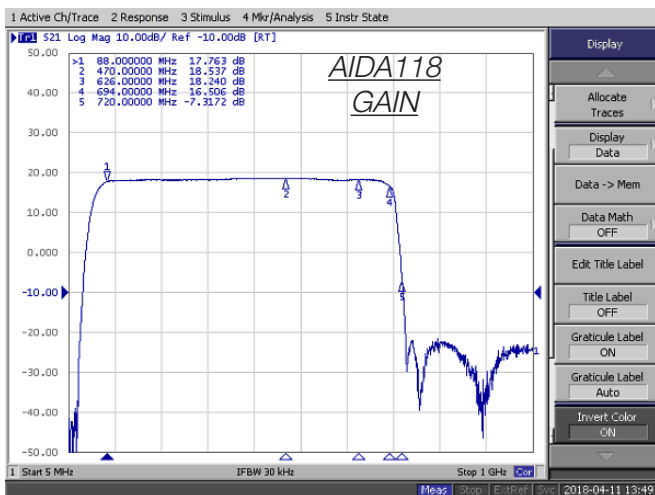

Laceys.tv
TM
Email: sales@laceys.tv
Website: online.laceys.tv

Melbourne Head Office:
42 Brunel Road, Seaford
VIC 3198, Australia
Ph (03) 9776 9222
Fax (03) 9776 9766

Sydney:
Ph (02) 9755 5026
Fax (02) 9755 5027

Brisbane:
Ph (07) 3290 2410
Fax (07) 3290 2552

Coffs Harbour:
Ph (02) 6651 6100
Fax (02) 6651 7022

Townsville:
Ph (07) 4779 3608